


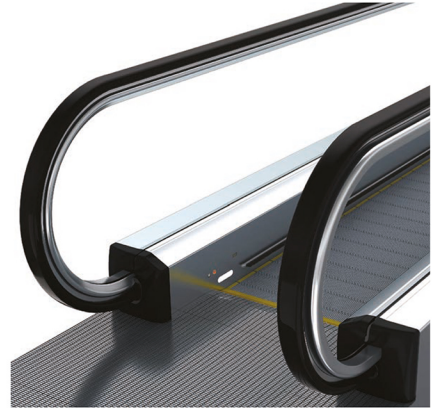

EFFICIENCY

Our range includes options which can support very high levels of traffic, offering optimum performance in extremely demanding conditions such as those at an airport or metro station.

RELIABILITY

The SRL range is backed up by a team of experts who work on each stage of the design development and on the subsequent performance of the product, even from the design of each model.



MOVING WALKWAYS		
TYPES	Trolley 	Long way 
Installation	Indoor/Outdoor (*)	
Working hours (hours per day)	16 hours	
Capacity (persons per hour)	Up to 6000	
Inclination (°)	10° / 11°/12°	0° / 6°
Speed (m/s)	0.5	
Width of tread (mm)	800/1000	1000/1200/1400
Vertical rise (m)	2m-8m	0-8m
Motor Type	One Speed-VVVF	